



CyWi: An Open-Source Wireless Innovation Lab for SmartAg, AR/VR, and Beyond

Design Document

Chenye Lim

Ryan Cullinan

Jian Chew

Shay Willems

Pawel Darowski

Tyler Beder

SD-DEC19-02

March 2019

1. Frontal Material

1.1 Table of Contents

1. Frontal Material	1
1.1 Table of Contents	1
1.2 List of Figures	2
1.3 List of Tables	2
2. Introductory Material	3
2.1 Problem Statement	3
2.2 Operating Environment	4
2.3 Intended Users and Intended Uses	4
2.4 Assumptions and Limitations	5
2.4.1 Assumptions	5
2.4.2 Limitations	5
2.5 Expected End Product and Deliverables	6
2.6 Related Work / Literature Review	6
2.7 Acknowledgements	6
3. Specifications and Analysis	7
3.1 Proposed Design	7
3.2 Design Analysis	9
4. Testing and Implementation	10
4.1 Interface Specifications	10
4.2 Hardware and Software	11
4.3 Process	11
4.4 Functional Testing	12
4.5 Non-Functional Testing	12
4.6 Results	13
5. Closure Material	14
5.1 Conclusion	14
5.2 References	14
5.3 Appendices	15
5.3.1 Intel NUC Comparison Chart	15
5.3.2 Intel NUC Comparison Graph	16

1.2 List of Figures

Figure 1: Use Case Diagrams	3
Figure 2: Bandwidth to Latency Relations	5
Figure 3: High Level Block Diagram	7

1.3 List of Tables

Table 1: Major Tasks with Description and Estimated Hours	15-17
Table 2: Expected Cost of the Project	17-18
Table 3: Project Checkpoints with Descriptions and Estimated Deadlines	18-20

2. Introductory Material

2.1 Problem Statement

Over the last decade, the experimentation of the Internet of Things (IoT) has been in full force because of the multitude of advantages it can bring to everyday life. Despite many years of research, we are still at the infancy of IoT and Industry 4.0 capabilities. IoT can be used for a wide range of products such as SmartAg, connected autonomous vehicles, smart grids, and AR/VR. Powered with the capabilities of 5G, IoT promises to change every aspect of our lives. But to continue with this pace of innovation, researchers need space to run experiments and gather real-world data.

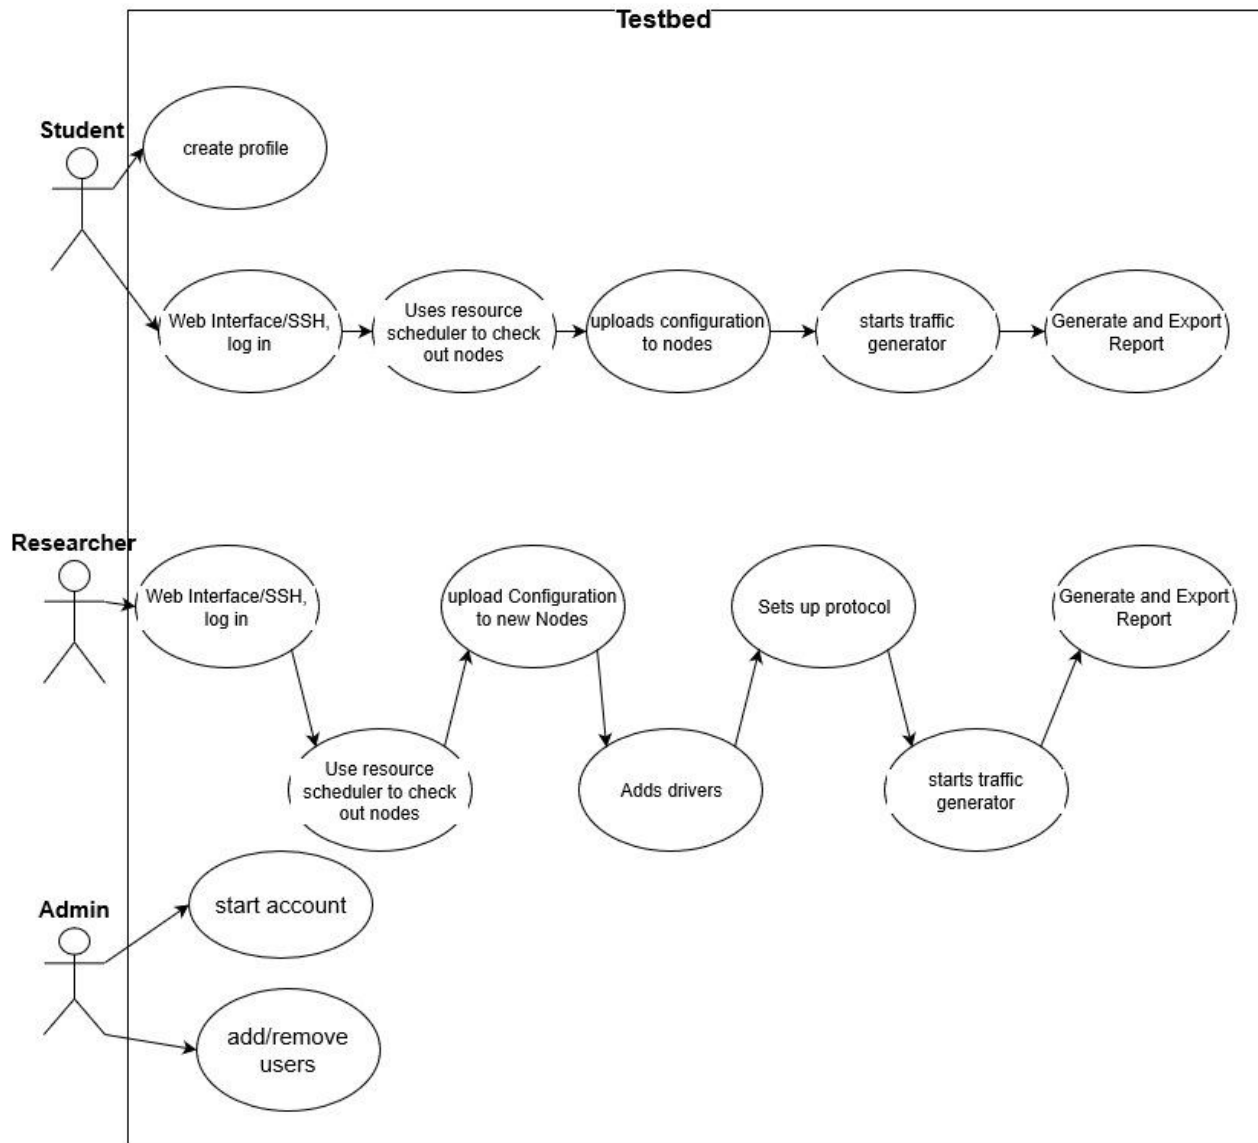


Figure 1: Use Case Diagrams

Iowa State University has decided to explore this field with the development of the CyWi lab. This lab will consist of a multi-node testbed located on the Iowa State campus and will be available to researchers and testers to run their experimentation code. This lab will feature the most bleeding-edge wireless innovation platforms as well as emerging wireless solutions. It will also feature 5G wireless for new learning, teaching, and researching across the globe.

2.2 Operating Environment

The CyWi's testbed will be located in 3050 Coover Hall at Iowa State University (ISU). This is a climate-controlled room with a keycard secured door. The only people allowed into the lab room are those with keycards: the professor/client, the ISU Electronics Technology Group (ETG), and a handful of researchers. Users will access the testbed via the remote web interface, never via physical access to the lab. One wall has windows facing west but the blinds will be closed so sunshine never touches the equipment. While it is not expected for the hardware to experience anything but optimal operating conditions, our web-based service will be exposed to the Internet so cyber attacks, such as DDoS, are possible.

2.3 Intended Users and Intended Uses

The CyWi testbed is intended for two general types of users: students and researchers.

Students learn about wireless signals and protocols in their courses via lectures, assignments, and small projects. Theoretical knowledge is crucial. However, building upon that foundation with extensive lab experience configuring real-world hardware will improve students' understanding of the subject matter. Implementing wireless topologies such as mesh, star, and point-to-point could inspire future IoT developers. Comparing Zigbee and Bluetooth Low Energy performance, for example, over assorted ranges, signal strengths, and conditions will extend students' knowledge of technology strengths and limitations. CyWi will provide students the opportunity to experiment with a variety of popular, existing wireless technologies and to expand their understanding in a safe environment.

Researchers, on the other hand, will appreciate the cutting-edge communication technologies represented by the CyWi testbed. Access to powerful and configurable software-defined radios (SDRs) will allow researchers to study a wide spectrum of new heterogeneous networks and explore exciting innovative ideas. Researchers will evaluate performance monitoring and statistics after each experiment to determine feasibility of their chosen path. Emerging technologies such as 5G, SmartAg, augmented reality, virtual reality, and Internet-of-Things will generate opportunities for decades of continuous communications development. As Figure 2

shows, CyWi is particularly equipped to handle experiments of various throughput and latency specifications.

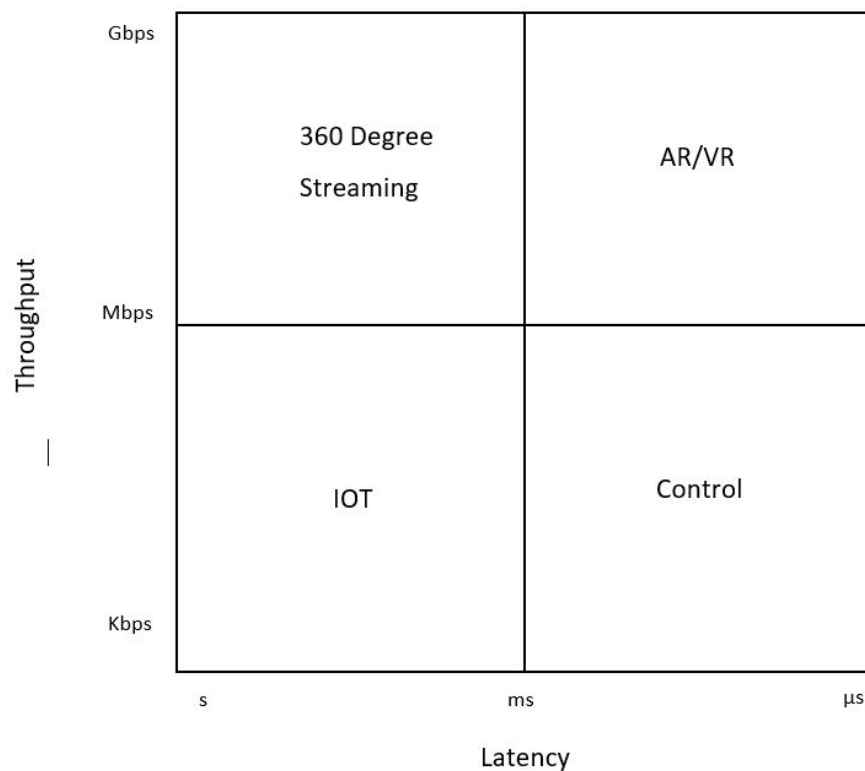


Figure 2: Bandwidth to Latency Relations

2.4 Assumptions and Limitations

2.4.1 Assumptions

- Environmental conditions in the lab room will remain nominal for electronics.
- Internet access will be sufficient and reliable.
- Outside wireless signal interference will be negligible.
- Users will be students and researchers so they will be somewhat familiar with testbeds.
- Users will participate in reporting bugs if or when they arise for continued improvement.
- ISU Electrical and Computer Engineering department will publish or advertise that this testbed is ready for students and researchers to use.

2.4.2 Limitations

- All software used must be open-source.
- Lab room has space for only 110 total nodes.
- Budget is a factor so the amount of software-defined radios (SDRs) is limited.
- Two semesters is the maximum time to spend designing and developing this project.

- Some elements of this project are new to us so time will need to be spend researching.

2.5 Expected End Product and Deliverables

The end product for this project will be a fully operational wireless communication testbed. The testbed will be comprised of a grid of individual nodes equipped with various wireless hardware and software platforms. These nodes will be monitored and controlled by a server that can be accessed via a web platform that we will implement.

2.6 Related Work / Literature Review


For this project, we looked into two different wireless testbeds: Powder and Orbit. Located at the University of Utah, Powder is very similar to the testbed that we plan on creating. It is based around open source platforms, which makes it more accessible for all types of wireless communication research. Powder has cutting-edge radio hardware and software enabling it use existing communication protocols. The testbed that we will create, unlike Powder, will be able to run experiments on the newest 5G and MIMO protocols. Orbit will be useful to us as it is an example of a very mature wireless testbed.

2.7 Acknowledgements

The CyWi team would like to give special thanks to professor Professor Hongwei Zhang . His technical assistance on the project will serve to be invaluable to us. Additionally we would like to thank Professor HongWei Zhang for securing the funding to make this project possible. Finally we would like to acknowledge the Iowa State Department of Electrical and Computer Engineering for providing the lab space in Coover Hall to create the CyWi testbed, and also we would like to thank ETG for their assistance in wiring the testbed.

3. Specifications and Analysis

3.1 Proposed Design

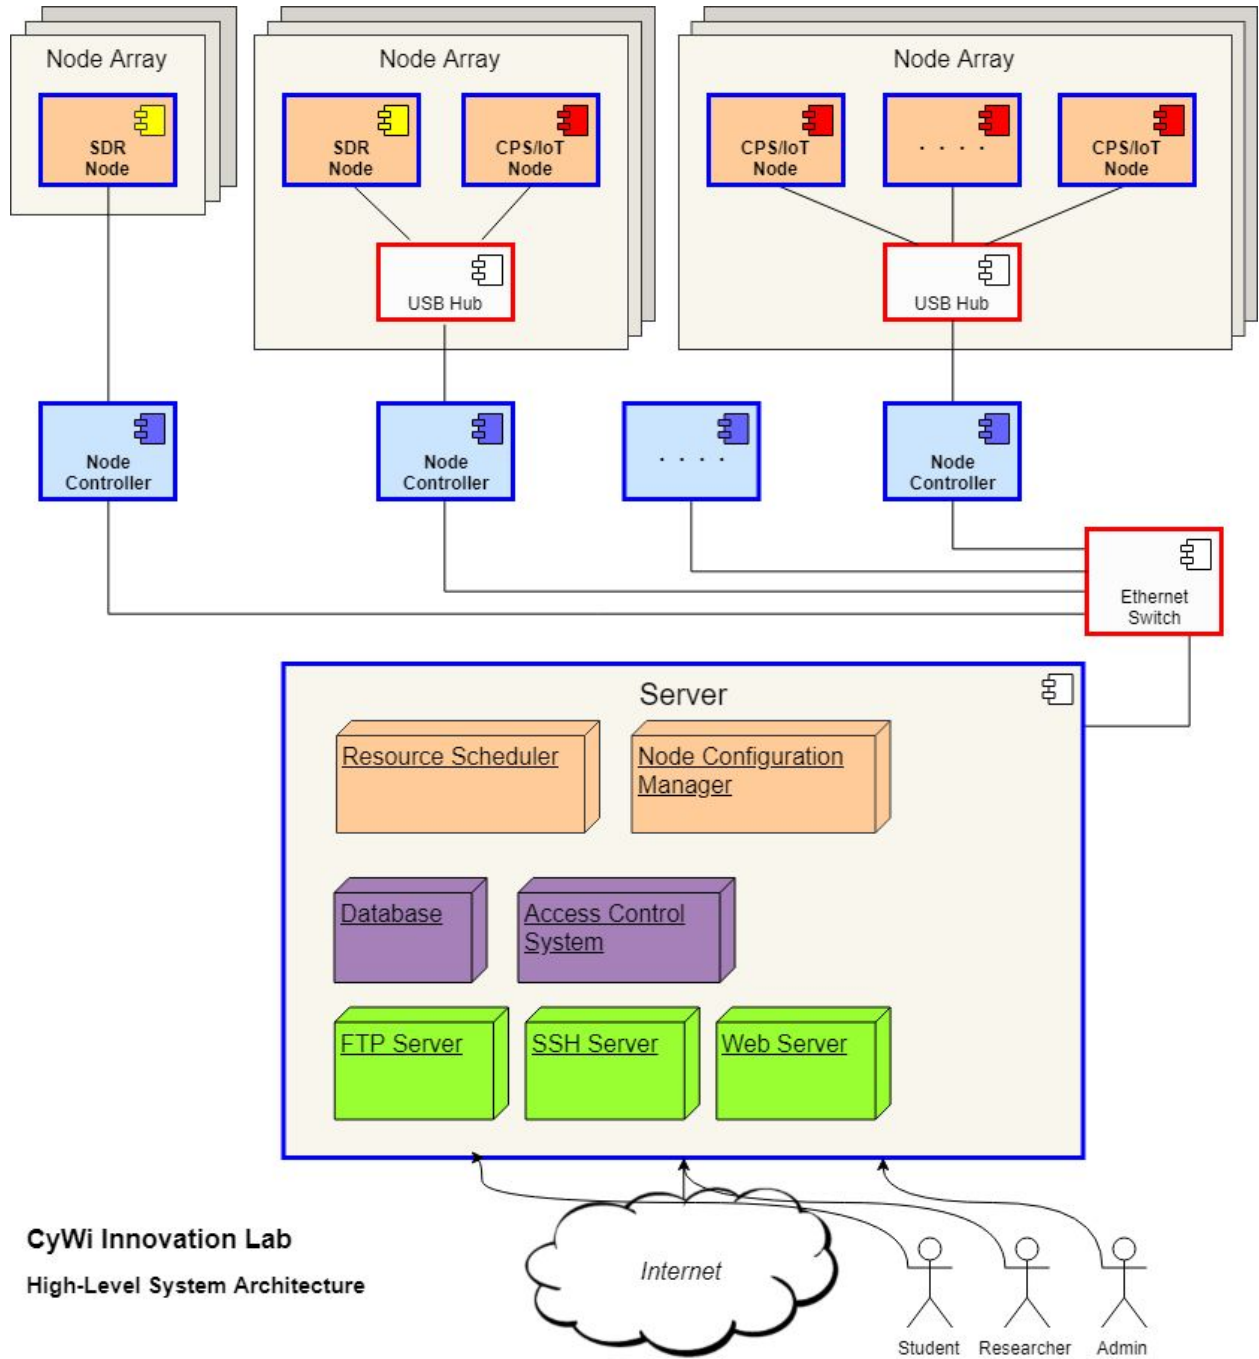

CyWi Innovation Lab
High-Level System Architecture

Figure 3: High Level Block Diagram

Our testbed design features two separate sets of wireless devices: SDR nodes and CPS/IoT nodes. Both sets of nodes are mounted to a 11x10 grid of square ceiling tiles -- each tile measuring two feet in width and length. To facilitate remote configuring of the nodes, USB cables connect each node to one of two node controllers via intermediate USB hubs. The node controllers are then connected to a networking switch via Ethernet cables and ultimately to our Internet-connected server.

SDR nodes account for a majority of the project budget so at the moment we are limited to three SDRs which will be sufficient to run interesting 5G experiments. We have settled on the Ettus USRP X310 platform due to its flexibility, reliability, and compatibility with the OpenAirInterface framework. These SDRs are capable of generating, transmitting, and receiving signals at up to 6 GHz. OpenAirInterface is a framework that provides software and tools to research 5G radio access networks.

CPS/IoT nodes are fairly inexpensive so we've purchased and mounted 20 Texas Instruments LAUNCHXL-CC26X2R1 development kits. These devices are capable of implementing multiple wireless protocols including Wi-Fi, Bluetooth Low Energy, and IEEE 802.15.4 standard protocols such as Thread, Zigbee, and Sub-1 GHz. The development kits feature a CC2642R MCU which includes a powerful ARM Cortex-M4F CPU, 352 KB of flash memory, and 80 KB of RAM. A dedicated low-power ARM Cortex-M0 processes RF signals to maximize energy efficiency. These development kits support TI-RTOS (an open-source real time operating system under a BSD-like license) and implement the SimpleLink SDK platform which provides well-documented hardware drivers and stacks. During our search for suitable CPS/IoT nodes, we compared this Texas Instruments development kit with others developed by Qualcomm, NXP, and Nordic but none of those were able to offer a powerful MCU, open documentation, and community support at the right price.

Two node controllers were installed on the ceiling tile grid to provide access to our SDR and CPS/IoT nodes. Node controllers are mini PCs running Linux/GNU that provide configuration and communication to the nodes. The SDR nodes, in particular, need powerful node controllers to implement their software radio components. For this task, we chose the Intel NUC8 (NUC8i7BEH) mini PC with a powerful i7-8559U CPU and supporting up to 32 GB of RAM. We carefully analyzed a variety of NUC7 and NUC8 mini PCs as well as the cheaper yet much less powerful MintBox. A comparison chart and graph can be found in Appendix 5.3.1 and 5.3.2. Eventually we settled on the NUC8i7BEH due to its high computational ability and comfortable price point, thanks in part to a less impressive GPU.

Finally, the server machine will host a multitude of open-source software designed to allow remote access, manage resources, store data, and interact with the node controllers. We plan

on repurposing as much freely-available software as we can find but inevitably we will need to write our own programs. The node configuration manager software that communicates with node controllers and individual nodes will certainly have to be developed in-house. Services such as a web server, FTP server, SSH server, and database will need careful configuration to with the rest of our systems.

The CyWi Innovation Lab will satisfy the following functional and non-functional requirements:

Functional Requirements

- System must register users and assign individual accounts
- Resource slices (time period, nodes, etc) will be reservable
- Resource scheduler must efficiently allocate node resources based on reserved slices
- Experiment scripts will be customizable by the users
- Experiments must be run remotely via web server
- Users will have the ability to export experiment results

Non-Functional Requirements

- System must remain available outside of maintenance hours
- System must implement robust state-machine for crash resilience
- Databases will be backed up on a regular basis
- System status and performance will be tracked and available for users
- Only registered users will be allowed to access the system
- All software will be open-source
- User experience must be responsive

The CyWi Innovation Lab works in accordance with several standards including:

- Ethernet (IEEE 802.3)
- Wi-Fi (IEEE 802.11)
- Bluetooth (IEEE 802.15)
- Thread, Zigbee, and Sub-1 GHz (IEEE 802.15.4)

3.2 Design Analysis

To date, we have largely focused on defining what a wireless testbed should be. Existing testbeds such as Powder and Orbit have helped us piece together how CyWi should function. Gaining access to Powder and Orbit took longer than we had hoped but eventually we were able to perform some tutorial experiments. These testbeds are already well-established and have a diverse environment of devices. At the start of the project, we had a goal of having 110 CPT/IoT nodes and 20 SDRs but the initial funding was not as rich as we had hoped. We had to scale back to 20 CPT/IoT nodes and 3 SDRs for the time being. Investors are keen on viewing

what we have planned so far so we are hopeful that more cash flow will soon be made available. However, whether we have 20 nodes or 110 nodes the server-side of the system will remain mostly the same. 20 nodes will be sufficient to provide a proof-of-concept for the project.

We have selected all of the testbed hardware. These choices are based on our solid research spanning many vendors and products. For our CPS/IoT hardware, we selected the TI LAUNCHXL-CC26X2R1 development kits. This TI development board supports many open source software and offers excellent documentation, both of which will allow our testbed to be more accessible. The next piece of hardware that we picked was the node controller. Our node controllers are mini PCs, specifically Intel NUC8s. Size is a factor because these PCs need to be mounted above the ceiling tile, but the PCs also need to be powerful enough to run several wireless devices at a time and SDRs are resource-demanding. The decision to go with the NUC8i7BEH was based primarily on its high performance but this was balanced with its price. After determining that the tasks these node controllers will be performing were going to be more CPU than GPU intensive, we placed more weight on the cost-to-performance ratio of the CPU rather than the GPU. We compared this CPU ratio across six different Intel NUC models and concluded that the NUC8i7BEH was the best choice for our application.

Overall, we are pleased with our hardware choices. We feel that a major strength of our decision process has been selecting our node controllers. The model we decided on after conducting research is both significantly cheaper and higher in performance than the NUC our client had originally suggested. One weakness of the project so far has been that we underestimated just how much time will be spent researching. The hardware selection process may be complete but we will continue to spend many, many hours reading documentation and bringing the technologies to life.

4. Testing and Implementation

4.1 Interface Specifications

To fully test our system, we have to look at each component to determine how it interfaces with the others. We can begin by defining the interfaces between our four types of physical hardware: CPS/IoT nodes, SDR nodes, node controllers, and the server. Then we can define the interfaces of our various services: web server, SSH server, FTP server, SQL database, access control system, resource scheduler, and node configuration manager.

CPS/IoT and SDR nodes interface directly with a node controller and with other like nodes via a chosen wireless protocol. A node controller is the intermediary between the server and node. Thus, the server interfaces with the node controllers and the users.

Multiple service processes run on the server machine and each have their own interfaces. At this point in the project, we don't have a clear understanding of how best to segment server responsibilities. In the coming weeks, we will have a more detailed plan put together to organize service flow. For the current purpose of this report, it is sufficient to say that the client will interact with the server, which will interact with node controllers to configure and gather data from the individual nodes.

4.2 Hardware and Software

Hardware used for testing:

- Off-campus client computer
- Texas Instrument CC26X2R1 Launchpad
- Ettus Research USRP X310 SDR
- Ettus Research USRP B210 SDR
- Intel NUC8

Software used for testing:

- Multiple browsers (Chrome and Firefox)
- Performance analysis tool built into Chrome
- SimpleLink testing software
- OpenAirInterface (OAI) testing tools
- Node status tracking tool

4.3 Process

The testing process will largely consist of unit testing throughout the entire project. With each new component, we will write some unit tests to verify that all its functions work. As more components are added, we will continue creating new unit tests as well as running the previous unit tests to verify that new components do not break the old ones. Some of the early tests will include verifying that a node controller can make basic configurations on a CPS/IoT node. Then we will use a node controller to configure two CPS/IoT nodes to sync together via Bluetooth and send a simple "hello world" message. As server complexity grows, our tests will grow more complex as well. Towards the end of the project, we will be using an off-campus client computer to login remotely and run experiments on the testbed.

4.4 Functional Testing

- Account registration testing
 - The user should be able to have an account after the approval of the administration. To test this, we can apply for an account and check for addition on the database server. The server should also be able to reflect any changes, such as password, made on the account.
- Resource reservation testing
 - Since there are a few different nodes in the system, users should be able to reserve nodes for a specified amount of time. To test it, the system should make notes about the chosen nodes being reserved and reflect it on the system status tracking.
- Resource scheduler testing
 - A same node can be shared among a few users at the same time. To test it, a few users attempt to reserve the same NUC at the same time. The resource scheduler should be able to schedule the NUC to the users efficiently and fairly.
- Experiment script testing
 - Users can run experiments scripts to the testbed. We can test it by feeding the testbed a working experiment script and check for the result produced. On the other hand, by feeding a broken script, the testbed should prompt an error message to the user.
- Remote web server access testing
 - We want the users to interface with the lab through a website. This means that we must be able to transfer files to the web server to be used in certain experiments.
- Experiment result export testing
 - Users will have the ability to export experiment results. After they are done running the experiments, they should be able to download the results. To test it, we can verify the data of downloaded files.

4.5 Non-Functional Testing

- Availability testing
 - Testing the availability of our system will require system monitoring software, either found freely online or developed in-house. The monitoring software will poll all services and devices at regular intervals and the results will be logged. The logged data will be graphed as a function of time to illustrate how often components fail. This way we can calculate the uptime of each component. One view of the logged data will sort by downtime so we can focus on improving the most troublesome components.

- Resiliency testing
 - We haven't received a server from Iowa State yet, much less written code for it at this point. But once we create a thorough state-machine document for every component that is implemented, we will enter every possible state and then branch to every other available state. The test will fail if at any point the system crashes or inconsistent data is discovered. Otherwise, if every possible state and branch has been exhausted the test will be a success.
- Database backup tests
 - Databases will hold important data such as user accounts, experiment results, and scripts. A cron job will regularly backup all important data and save it offsite. The backups must be tested regularly to assure they are being saved successfully. To test a backup, we will spin up a mirror virtual machine and compare the data with the live virtual machine. If the data is consistent, the test will be a success. Otherwise, the backup cron job is either missing or corrupting data and we will need to troubleshoot.
- System status tracking testing
 - Users should be able to view if certain nodes are unavailable. This tracking system will be tested by viewing the node status tool and removing a device from the system. The node status tool should almost instantaneously report that the node has become unavailable. When the device is added back to the system, the node status tool should report that the node is available again.
- Security testing
 - Only registered users should have access to the system. We will try to access each component to determine if it is secure. Testing will include clicking on links as well as directly going to component URLs. Without being logged in, an authorization error should occur and the event should be logged.
- Usability testing
 - The user experience must be responsive. To test that each web page loads quickly, we will use the performance analysis tool built into Google Chrome.
- Licensing verification
 - CyWi is an open-source project so all code must be made available freely. To keep track of this, we will keep a list of all of the software that we use and verify that each one is in fact open-source. In this way, we can offer proof that CyWi is open source.

4.6 Results

We have not completed any testing yet because we have not fully installed all of the hardware or built the software, but we will be conducting the tests at a later point in time. We are looking at beginning some basic unit tests by the end of the 2019 spring semester.

5. Closure Material

5.1 Conclusion

Technological innovation has been steadily increasing over the last few decades. The future is fast approaching and Cyber-Physical Systems, the Internet of Things, and 5G wireless will soon be mainstream. These highly disruptive technologies will change every facet of modern life including healthcare, home safety, industrial automation, transportation, education, social connectivity, entertainment, and more.

Such a social seachange cannot be made possible without the continued efforts of researchers. The Iowa State University CyWi innovation lab aims to provide students and researchers the resources to learn about emerging technologies and to push the boundaries of possibility forward. Registered users will have a well-documented matrix of SDR and CPT/IoT nodes at their disposal with the ability to run custom experiments across several wireless protocols. Exportable experiment results will allow researchers to take their data offline for further analysis. Innovating in such a lab environment will speed up the next technological revolution.

5.2 References

- [1] <https://powderwireless.net/>
- [2] <https://www.intel.com/content/www/us/en/products/boards-kits/nuc/kits/nuc8i7hvk.html>
- [3] <https://www.ettus.com/product/details/X310-KIT>
- [4] <https://www.ettus.com/product/details/UB210-KIT>
- [5] <http://www.ti.com/tool/launchxl-cc26x2r1>
- [6] <https://www.openairinterface.org/>

5.3 Appendices

5.3.1 Intel NUC Comparison Chart

	NUC6i7KYK	NUC7i7BNH	NUC7i7DNK1 E	NUC8i7HVK	NUC8i7BEH	NUC8i7HNK
Cost (\$)	540	450	560	850	470	780
CPU Name	i7-6770HQ	i7-7567U	i7-8650U	i7-8809G	i7-8559U	i7-8705G
CPU Clock Speed	2.6 GHz, up to 3.5 GHz	3.5 GHz, up to 4.0 GHz	1.9 GHz, up to 4.2 GHz	3.1 GHz, up to 4.2 GHz	2.7 GHz, up to 4.5 GHz	3.1 GHz, up to 4.1 GHz
CPU Benchmark (CPU PassMark)	9722	6496	8835	11036	12235	10017
CPU Price vs Performance	0.0555	0.0693	0.0634	0.0770	0.0384	0.0779
Max Memory Supported	32 GB DDR4	32 GB DDR4	32 GB DDR4	32 GB DDR4	32 GB DDR4	32 GB DDR4
GPU Name	Iris Pro 580	Iris Plus 650	UHD 620	Radeon RX Vega M GH	Iris Plus 655	Radeon RX Vega M GL
GPU Benchmark (PassMark G3D)	1868	1555	1036	6990	1959	5142
GPU Price vs Performance	0.2891	0.2894	0.5405	0.1216	0.2399	0.1517
Storage Drive Type	2x M.2	M.2 and SATA	SATA	2x SATA 2x M.2	1x SATA 1x M.2	2x SATA 2x M.2

5.3.2 Intel NUC Comparison Graph

